Disassembly SR405QM Backplate

Removal of the back plate to expose the circuitry of the bass.

Written By: Chris Pittner




INTRODUCTION

Follow these steps to remove the back plate from your bass guitar.

TOOLS:

- Phillips #2 Screwdriver (1)

Step 1 — Back Plate

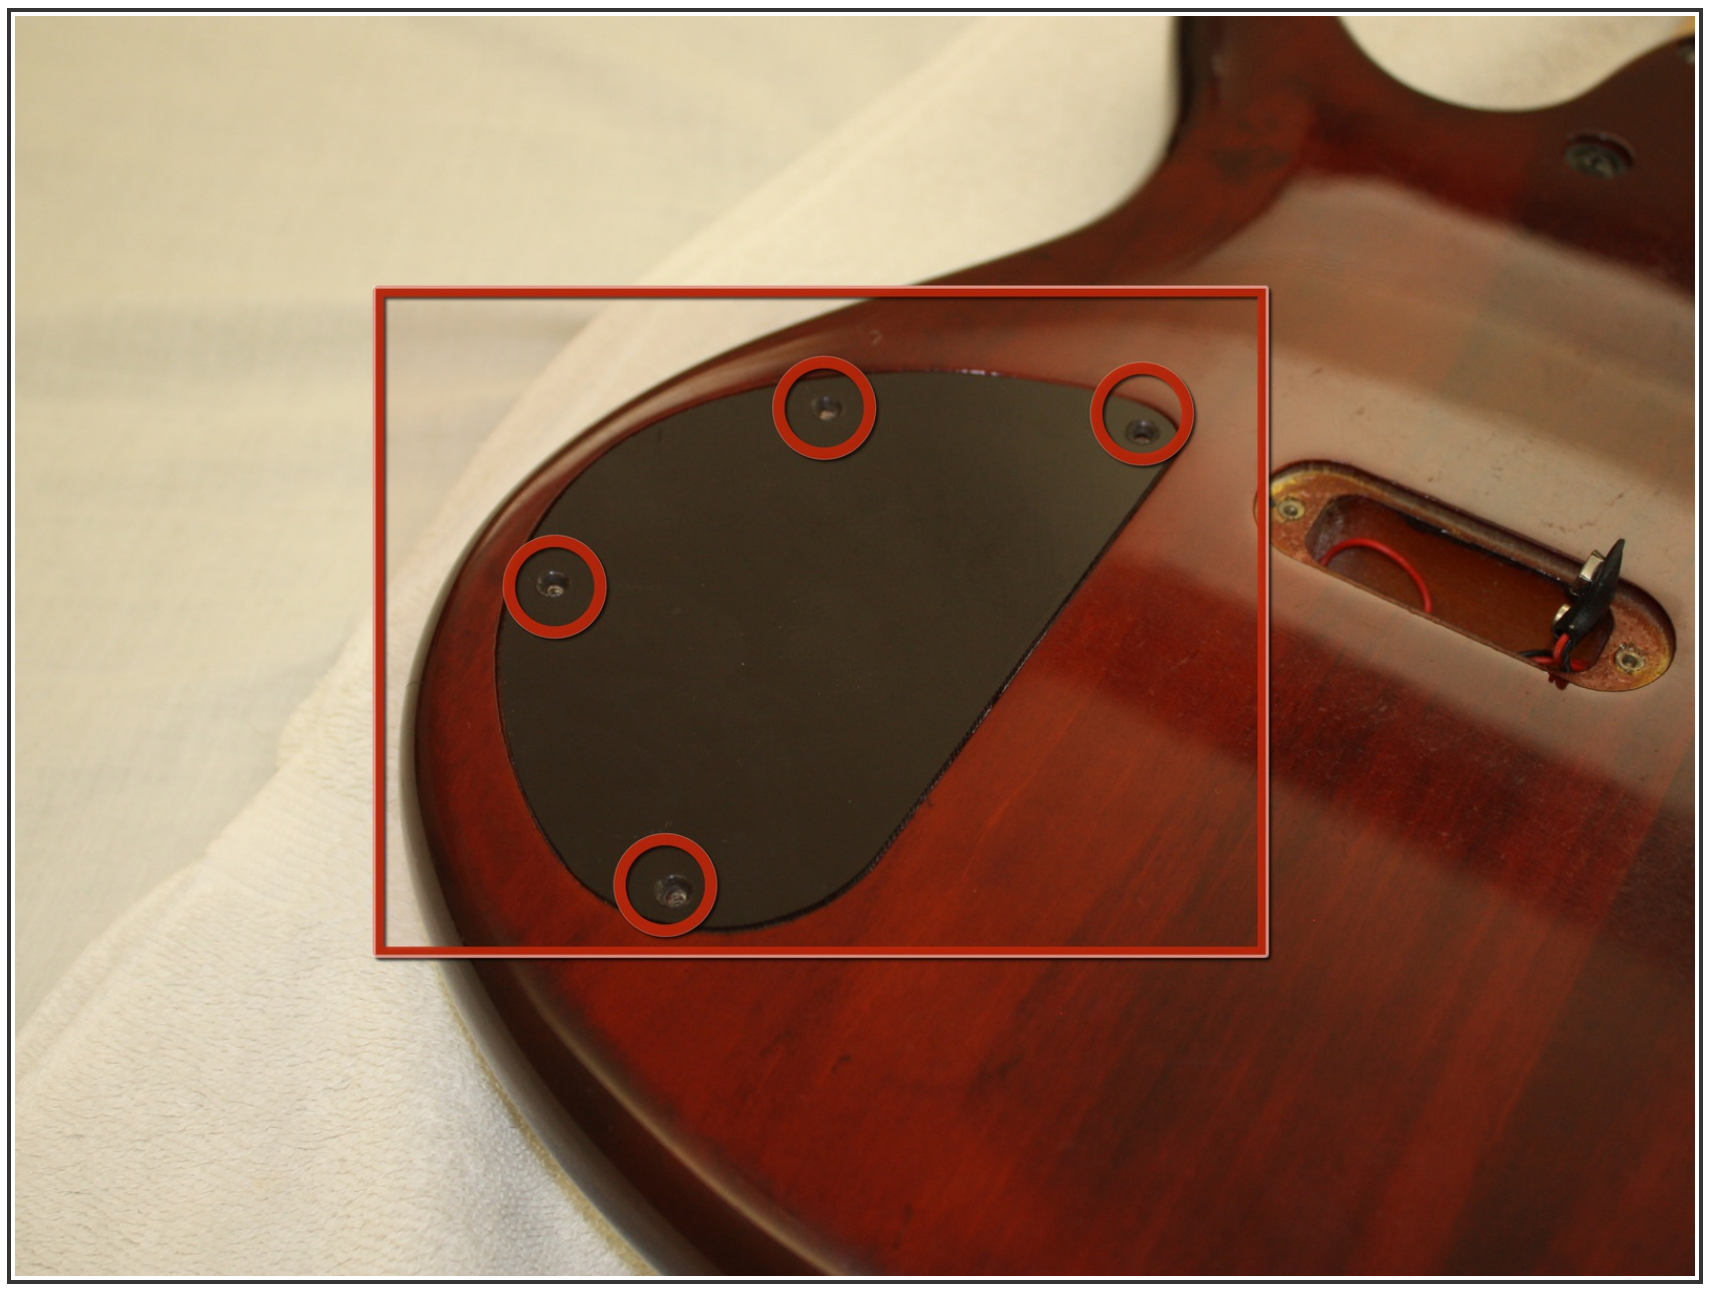

- Locate back plate cap and screws.

Step 2






- Use a phillips head screwdriver to remove the four screws,#1-1mm, by turning the screws counter-clockwise.

Step 3



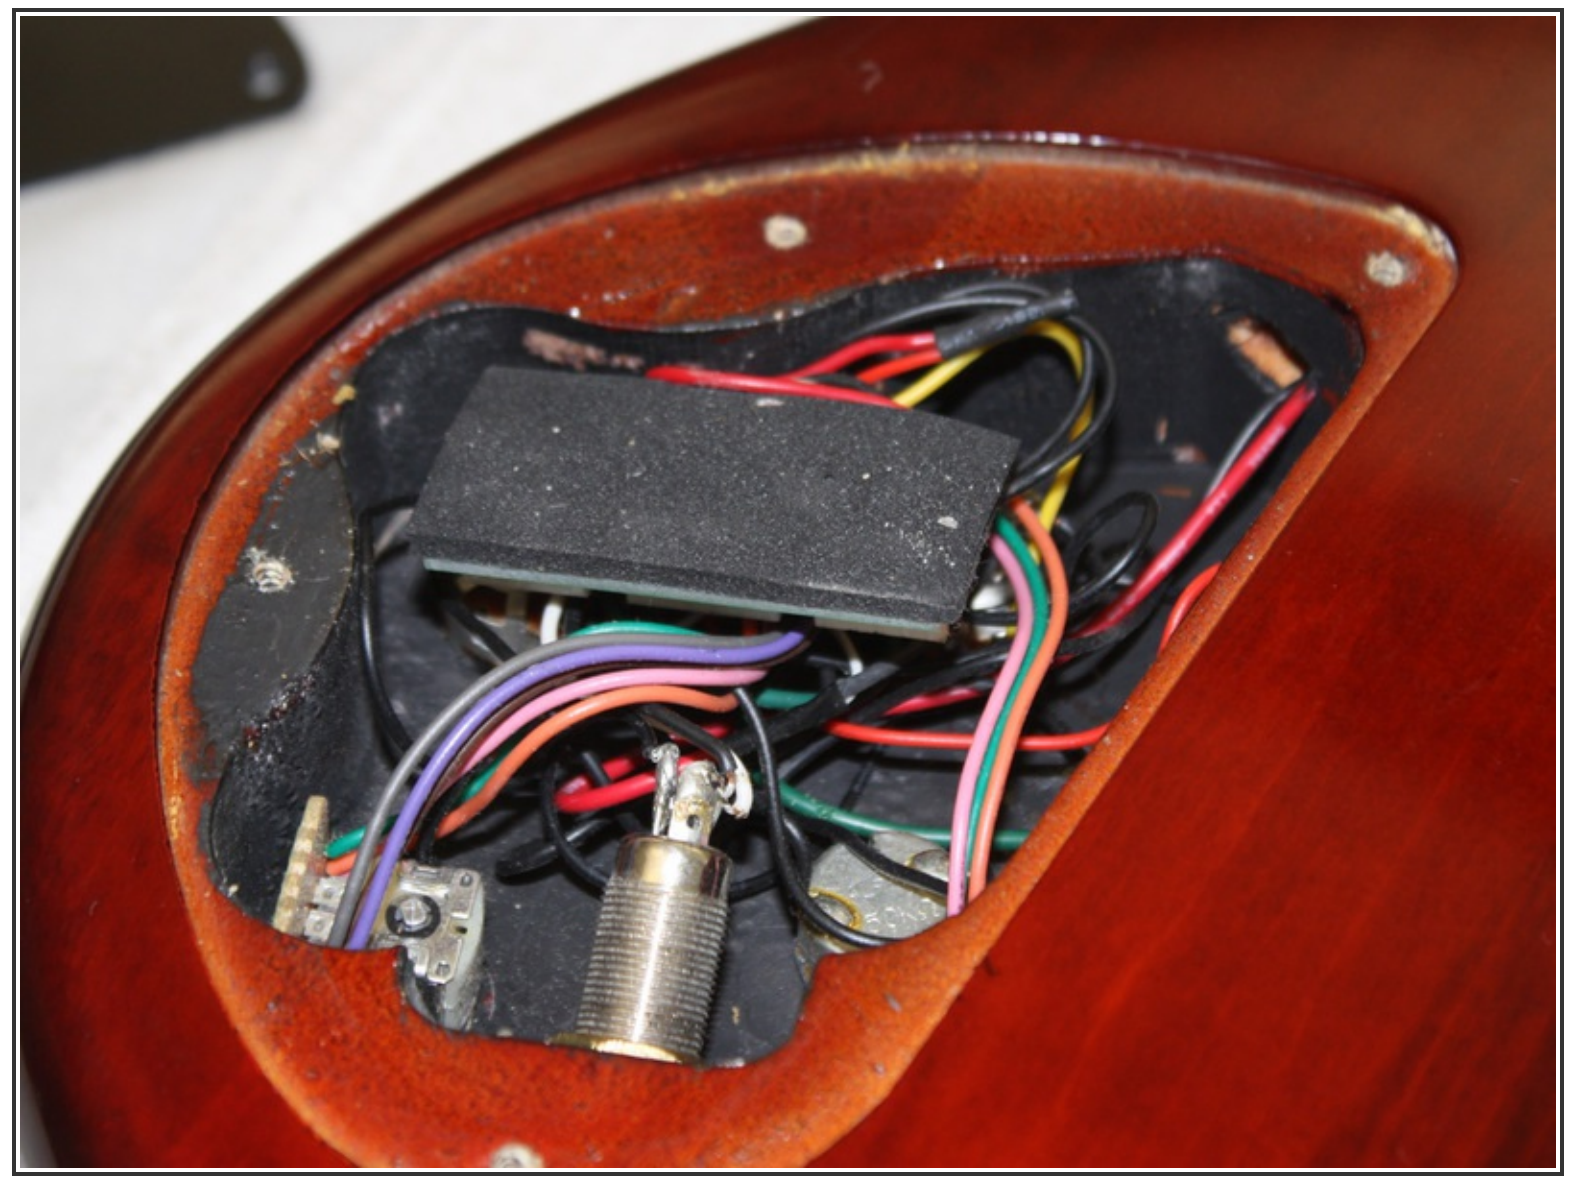

- Remove cap by lifting upwards, revealing the circuitry of the instrument.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 02:31:25 AM.